


Viti a testa cilindrica con calotta ed impronta a croce
Cross recess pan head screws

DIN 7985

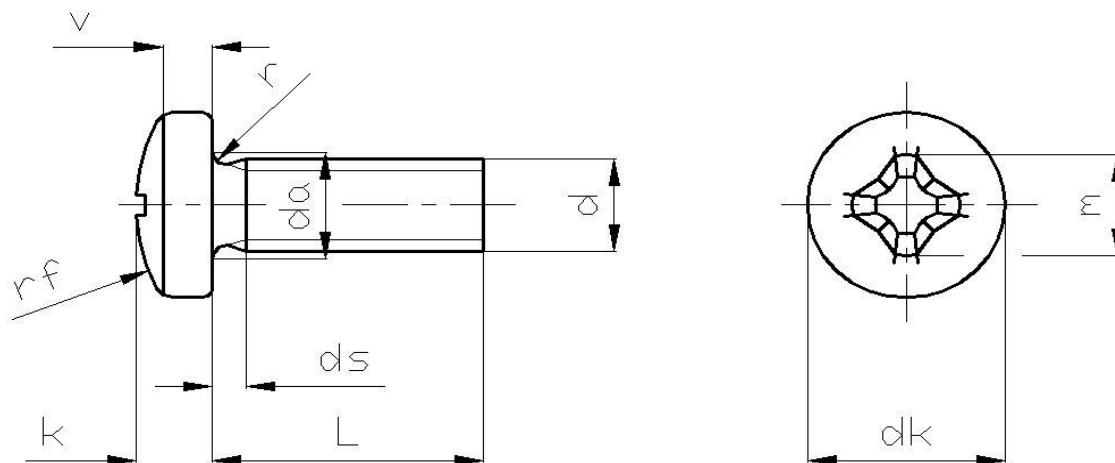

Diametro		M3	M4	M5	M6	M8
P	passo	0,5	0,7	0,8	1	1,25
ds	max	1,0	1,4	1,6	2,0	2,5
da	max	3,6	4,7	5,7	6,8	9,2
dk	max	6	8	10	12	16
	min	5,7	7,64	9,64	11,57	15,57
k	nom	2,4	3,1	3,8	4,6	6,0
	max	2,52	3,25	3,95	4,75	6,15
	min	2,28	2,95	3,65	4,45	5,85
r	min	0,1	0,2	0,2	0,25	0,4
rf	≈	6	8	10	12	16
v	≈	1,6	2,0	2,5	3,0	3,7
m		3,1	4,6	5,3	6,8	9,0
t	max	2,00	2,54	3,27	3,53	4,68
	PHILLIPS min	1,70	2,04	2,77	3,03	4,18
m		3,0	4,3	5,0	6,7	8,8
t	max	1,93	2,36	3,10	3,48	4,52
	POZIDRV min	1,68	1,90	2,64	3,02	4,06